




Core 2

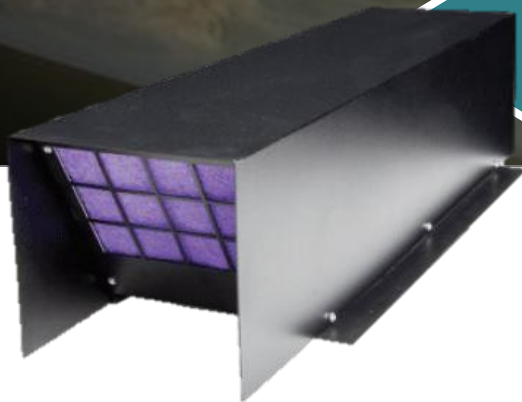

Watch Informative Video



APPLICATIONS

Designed for use where the elimination of high levels of bacteria and odors are required. The CORE 2 unit accomplishes this by destroying the bacteria or gases that cause the odors without filtration. Some examples for this application include: dumpsters, lift stations, or exhaust ventilation. The Core 2 is designed for indoor or outdoor installations. The Core 2 unit produces extremely efficient and appropriate levels of UV produced ozone without any detrimental nitric acid production, which is the case with many ozone producing generators. The unit is switchable from low, medium or high to enable production of only the necessary level of oxidizing gases to deal with the bacteria and/or odors present.

PERFORMANCE

- Low 3.34 grams/hr. ozone
- Med 6.67 grams/hr. ozone
- High 10.0 grams/hr. ozone

WARRANTY

- 1 Year Limited Warranty

SPECIFICATIONS


- 27.5" L x 9.5" W x 7.25" H
- 12 pounds
- 8' Connector Hose
- 2.25" Mounting Adapter Included
- Replacement Unit Filter Included

POWER USAGE

- Low 112 watts, 1.02A
- Med 175 watts, 1.50A
- High 239 watts, 2.02A

Available in 120V, 60Hz or 230V, 50Hz (power usage shown for 120V model)

For further information:



InspiredTEC, LLC
Technologies for Environmental Conditioning